


ENVIRONMENTAL PRODUCT DECLARATION

EXTRUDED ALUMINUM

INDUSTRY-AVERAGE EXTRUDED ALUMINUM
MANUFACTURED IN NORTH AMERICA

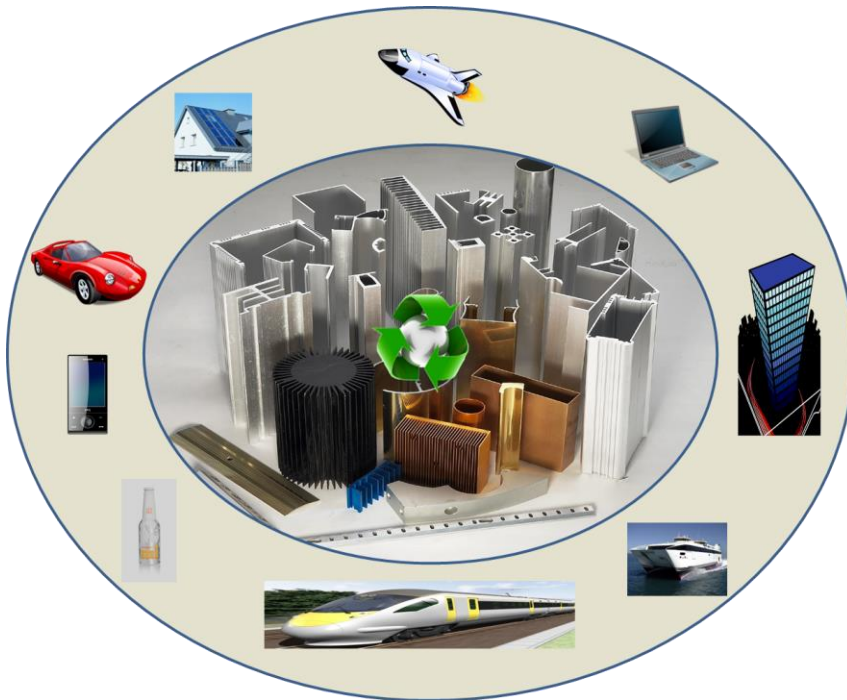

The Aluminum Association and the aluminum industry are committed to responsible environmental stewardship. Aluminum is one of the most sustainable materials in use today:

- **Strong and lightweight:** Aluminum's favorable strength-to-weight ratio means it can be substituted for heavier materials, driving energy efficiency.
- **Infinitely recyclable:** Aluminum can be recycled over and over again without losing any of its fundamental properties.
- **Efficiency Improvements:** Through voluntary industry efforts, the North American aluminum industry has reduced the carbon footprint of primary aluminum production by 37 percent since 1995.
- **Corrosion-resistant:** Durable aluminum lasts longer than many competing materials, limiting the need for replacement.
- **Highly recycled:** Aluminum is one of the most recycled materials on the market today. And producing recycled aluminum takes just 8 percent of the energy needed to make primary aluminum.



ENVIRONMENTAL PRODUCT DECLARATION






Extruded Aluminum Semi-Fabrication
Products of Aluminum and Aluminum Alloys

According to ISO 14025 and EN 15804

This declaration is an environmental product declaration (EPD) in accordance with ISO 14025. EPDs rely on Life Cycle Assessment (LCA) to provide information on a number of environmental impacts of products over their life cycle. Exclusions: EPDs do not indicate that any environmental or social performance benchmarks are met, and there may be impacts that they do not encompass. LCAs do not typically address the site-specific environmental impacts of raw material extraction, nor are they meant to assess human health toxicity. EPDs can complement but cannot replace tools and certifications that are designed to address these impacts and/or set performance thresholds – e.g. Type 1 certifications, health assessments and declarations, environmental impact assessments, etc. Accuracy of Results: EPDs regularly rely on estimations of impacts, and the level of accuracy in estimation of effect differs for any particular product line and reported impact. Comparability: EPDs are not comparative assertions and are either not comparable or have limited comparability when they cover different life cycle stages, are based on different product category rules or are missing relevant environmental impacts. EPDs from different programs may not be comparable.



PROGRAM OPERATOR	UL Environment
DECLARATION HOLDER	The Aluminum Association
DECLARATION NUMBER	4786092064.102.1
DECLARED PRODUCT	Extruded Aluminum
REFERENCE PCR	Products of Aluminum and Aluminum Alloys (IBU, July 2012)
DATE OF ISSUE	October 16, 2014
PERIOD OF VALIDITY	5 years
EXTENSION PERIOD	October 16, 2022
CONTENTS OF THE DECLARATION	Product definition and information about building physics Information about basic material and the material's origin Description of the product's manufacture Indication of product processing Information about the in-use conditions Life cycle assessment results Testing results and verifications
The PCR review was conducted by:	The Independent Expert Committee
This declaration was independently verified in accordance with ISO 14025 by Underwriters Laboratories <input type="checkbox"/> INTERNAL <input checked="" type="checkbox"/> EXTERNAL	 Wade Stout, UL Environment
	 Thomas Gloria, Industrial Ecology Consultants
This life cycle assessment was independently verified in accordance with ISO 14044 and the reference PCR by:	 Thomas Gloria, Industrial Ecology Consultants

This EPD conforms with EN 15804

ENVIRONMENTAL PRODUCT DECLARATION



Extruded Aluminum
Products of Aluminum and Aluminum Alloys

According to ISO 14025

Product

Product Description

This EPD covers the production of semi-fabricated and surface-finished aluminum extrusion products. The results represent an average across all extruded aluminum products manufactured in North America (United States and Canada). Averages are obtained through aggregating production-weighted data from the participating data.

Applications

Extruded aluminum is used in a variety of market sectors, including the following:

- Transportation: automobile structures and components, truck and trailer structures and components, train structure and components, aircraft structure and components, etc.
- Building, construction and infrastructure: building windows, doors, curtain walls, facades, skylights, green houses, roof structures, furniture and decorations, solar device frames and structures, structure and components of bridges and stadiums, etc.
- Consumer durables: components of consumer durable goods, such as computers, home appliances, and recreation devices and utilities.

Technical Data

Name	Value	Unit
Density	2.66-2.84	(kg/m ³) x 10 ³
Melting point (Typical)	475-655	°C
Electrical conductivity (Typical) at 20°C/at 68°F	Equal Volume:16-36	MS/m (0.58*%IACS)
Thermal conductivity (Typical) at 25°c/at 77°F	113-234	W/(m.K)
Average Coefficient of thermal expansion (Typical) 20° to 100°c /68° to 212°F	22.3-23.9	per °C
Modulus of elasticity (Typical)	69-73	MPa x 10 ³
Hardness (Typical)	19-150	HB
Yield strength (min)	15-490	MPa
Ultimate tensile strength (min)	60-560	MPa
Breaking elongation (min) (50mm & 4D)	>4	%
Chemical composition	Varying alloy by alloy, Al 87.17-99.6	% by mass



ENVIRONMENTAL PRODUCT DECLARATION



Extruded Aluminum
Products of Aluminum and Aluminum Alloys

According to ISO 14025

Application Rules

ASTM B221-13/B221M-13 Standard Specification for Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes

ASTM B241/B241M-12e1 Standard Specification for Aluminum and Aluminum-Alloy Seamless Pipe and Seamless Extruded Tube

ASTM B317/B317M-07 Standard Specification for Aluminum-Alloy Extruded Bar, Rod, Tube, Pipe, Structural Profiles, and Profiles for Electrical Purposes (Bus Conductor)

ASTM B345/B345M-11 Standard Specification for Aluminum and Aluminum-Alloy Seamless Pipe and Seamless Extruded Tube for Gas and Oil Transmission and Distribution Piping Systems

ASTM B429/B429M-10e1 Standard Specification for Aluminum-Alloy Extruded Structural Pipe and Tube

ASTM B491/B491M-06 Standard Specification for Aluminum and Aluminum-Alloy Extruded Round Tubes for General-Purpose Applications

Delivery Status

The output of the extrusion process is a semi-fabricated and surface finished extrusion product transported to a component or final product manufacturer.

Base and Ancillary Materials

Extruded aluminum products made in North America contain a considerable proportion of metal recycled from aluminum scrap. The metal composition of products, based on metal feedstock information collected at the melting furnaces for extrusion billet making, is shown below. Products shipped to different market sectors may vary significantly on its metal compositions. Recovered aluminum from internal process (run-around) scrap is considered as a repeated closed-loop manufacturing process and therefore is excluded from metal composition declaration. Definitions of Internal Process (Run-Around) Scrap, Post-Industrial Scrap and Post-Consumer Scrap are consistent with ISO 14021/25 (2006) on environmental labels and declarations, and the related interpretations by UL Environment.

Extruded aluminum products may include various types of coatings, including anodized, painted, and laquered finishes. All coating materials are included in inventory, based on averages across the industry.

Category of Metal Source	Percentage (by mass)
Primary Aluminum (including alloy agents)	49
Recovered Aluminum from Other Post-Industrial Scrap	20
Recovered Metal from Post-Consumer Scrap	31



ENVIRONMENTAL PRODUCT DECLARATION



Extruded Aluminum
Products of Aluminum and Aluminum Alloys

According to ISO 14025

Manufacture

The extrusion process takes cast extrusion billet (round bar stock produced from direct chill molds) and produces extruded shapes. The process begins with an inline preheat that takes the temperature of the billet to a predetermined level depending on the alloy. The billet is then sheared if not already cut to length and deposited into a hydraulic press. The press squeezes the semi-plastic billet through a heated steel die that forms the shape. The shape is extruded into lengths defined by the take-off tables and is either water quenched or air cooled. The shape is then clamped and stretched to form a solid straightened length.

The straighten lengths are cut to final length multiples and may be placed in an aging furnace to achieve a desired temper. Lengths are then finished (drilled and shaped) and placed into a coating process. The types of coatings include anodized, painted, and lacquered finishes.

Environment and Health during Manufacturing

Air: Hazardous air emission releases comply with regulatory thresholds.

Water/soil: Pollutants in wastewater discharge comply with regulatory thresholds.

Noise: Due to adequate acoustical absorption and mitigation devices, measurements of sound levels have shown that all values inside and outside the production plant comply with regulatory thresholds.

Product Processing and Installation

Further processing and installation of extruded aluminum product depends on the final application of the product and is outside the scope of this EPD.

Packaging

Product delivery packaging includes wood, steel, paper board, and sometimes plastic wraps. Packaging is included in the scope of this EPD.

Condition of Use

No special conditions of use are relevant for this product under the scope of this EPD.



ENVIRONMENTAL PRODUCT DECLARATION



Extruded Aluminum
Products of Aluminum and Aluminum Alloys

According to ISO 14025

Environment and Health During Use

The environmental and health effects during use are dependent on the ultimate use of the extruded aluminum and are outside the scope of this EPD. The following general statements are relevant for all aluminum products:

- Aluminum products are often made from both primary and recycled ingots
- There is no relevant chemical composition difference between primary and secondary ingots if both are governed by the same alloy designation and chemical composition limit standards
- The service life of the final product depends on its application, but is typically long due to aluminum's excellent corrosion resistance
- For that same reason, maintenance needs during use are usually low.

Reference Service Life

Service lives for aluminum extrusions vary based on the application. This EPD does not cover the product use phase and therefore makes no specific claim as to a typical reference service life.

Extraordinary Effects

Fire: Aluminum products comply with all local and federal laws with respect to fire hazards and control.

Water: There is no evidence to suggest water runoff or exposure under normal and intended operation will violate general water quality standards.

Mechanical destruction: Not relevant for aluminum extrusions.

Recycling Phase

Aluminum is a highly recyclable material. During manufacturing, most process and new scrap are fed back into the production process. At the end of life, aluminum scrap is collected and sold to both secondary smelting and semi-fabrication companies. The recycling rate for aluminum scrap is assumed to be 95%. Recycling over 95% is typical for aluminum products in high volume automotive and construction market sectors (IAI 2013).

Post-industrial scrap is highly utilized within the aluminum industry. Most process and new scrap materials that occur in the manufacture and processing of extruded aluminum are fed back into the production process.

Disposal

It is assumed that 5% of the extruded aluminum products are sent to the landfill for disposal at the end of life. The European Waste Code for aluminum is 17 04 02.



ENVIRONMENTAL PRODUCT DECLARATION



Extruded Aluminum
Products of Aluminum and Aluminum Alloys

According to ISO 14025

Further Information

For further information on aluminum and aluminum products, please visit the Aluminum Association website:
www.aluminum.org.

The life cycle assessment was conducted by PE INTERNATIONAL using GaBi data.



ENVIRONMENTAL PRODUCT DECLARATION



Extruded Aluminum
Products of Aluminum and Aluminum Alloys

According to ISO 14025

Life Cycle Assessment

Declared Unit

The declared unit is the production and end-of-life treatment of one metric ton of extruded aluminum product. The results can be converted to one kilogram by dividing by 1000.

System Boundary

This is a “cradle-to-gate – with options” EPD. The following processes are considered in the product stages A1–A3 of the aluminum extrusion production:

- The provision of resources, additives and energy
- Transport of resources and additives to the production site
- Production process of extruded aluminum on site, including energy, production of additives, disposal of production residues, consideration of related emissions, and recycling of production scrap (“closed loop”).

Product stages C4 and D are also included, with 95% of the extruded product assumed to be recycled at the end-of-life, and 5% disposed of by landfilling. End-of-life recycling is accounted for using the avoided burden recycling methodology.

DESCRIPTION OF THE SYSTEM BOUNDARY (X = INCLUDED IN LCA; MND = MODULE NOT DECLARED)																	
PRODUCT STAGE			CONSTRUCTION PROCESS STAGE		USE STAGE							END OF LIFE STAGE			BENEFITS AND LOADS BEYOND THE SYSTEM BOUNDARIES		
Raw material supply	Transport	Manufacturing	Transport	Construction-installation process	Use	Maintenance	Repair	Replacement ¹	Refurbishment ¹	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential	
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D	
X	X	X	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	X	X



ENVIRONMENTAL PRODUCT DECLARATION



Extruded Aluminum
Products of Aluminum and Aluminum Alloys

According to ISO 14025

Estimates and Assumptions

The LCA required only limited use of estimates and assumptions. The most relevant estimation/assumption is the end-of-life recycling rate of 95%, which is discussed in the *Recycling Phase* section. Averages and best-estimates were used to fill in minor data gaps, such as the source of ingots for some facilities. Other estimates and assumptions are discussed in detail in the LCA background report.

Cut-off Criteria

Input: All material flows that enter the system and are over 1% of the product mass or contribute more than 1% to the primary energy consumption are included.

Output: All material flows that exit the system and whose environmental impact makes up more than 1% of the total impact in an impact category considered are included.

Background Data

In order to model the life cycle for the production of the extruded aluminum, the GaBi 6 software system developed by PE INTERNATIONAL was used. All relevant background data necessary for the production of cold-rolled aluminum were taken from the GaBi 2012 databases or were made available by the Aluminum Association through industry survey results. Companies participating in the project, either with AA or AIA, are provided in the *Participating Companies* section.

Data Quality

The data is considered of high quality. Inventory data quality is judged by its precision (measured, calculated or estimated), completeness (e.g., unreported emissions), consistency (degree of uniformity of the methodology applied on a study serving as a data source) and representativeness (geographical, temporal, and technological). To cover these requirements and to ensure reliable results, first-hand industry data in combination with consistent background life cycle inventories from the GaBi 2012 database were used.

The LCI data sets from the GaBi database are widely distributed and used with the GaBi 6 Software. The datasets have been used in LCA models worldwide in industrial and scientific applications in internal as well as in many critically reviewed and published studies. In the process of providing these datasets, they are cross-checked with other databases and values from industry and science.



ENVIRONMENTAL PRODUCT DECLARATION



Extruded Aluminum
Products of Aluminum and Aluminum Alloys

According to ISO 14025

Period under Review

Primary data collected from the participating companies and from their operational activities is representative for the year of 2010. Additional data necessary to model raw material production and energy generation, etc. were adopted from the GaBi 6.0 software system database.

During the survey, however, a small group of semi-fabrication facilities reported operational data for 2008, 2009, or 2011, depending on the time when they started to respond to the survey and the convenience of their data availability. This deviation from the defined reference year has been taken into account as it is being assumed that there are no radical changes in the technology and operational practice for semi-fabrications from the year 2008 to 2011. Additional data necessary to model raw material production, energy generation, etc. were adopted from the GaBi 2012 database with typical reference years between 2006 and 2010.

Allocation

Allocation is used to address recycled content, post-production scrap, and waste at end-of-life. The avoided burden allocation approach was applied. Under this approach, end-of-life scrap is first balanced out with any open scrap inputs into production. Only the remaining *net scrap* is then modeled as being sent to material recycling in order to avoid double-counting the benefits of using recycled content. If more scrap is recovered at product end-of-life than is required in the manufacturing stage, the product system receives a credit equal to the burden of primary material production minus the burden of recycling scrap into secondary material based on the mass of secondary material produced. This credit represents the avoided burden of primary material production.

Comparability

A comparison or an evaluation of EPD data is only possible if all the data sets to be compared were created according to EN 15804 and the building context, respectively the product-specific characteristics of performance are taken into account.

ENVIRONMENTAL PRODUCT DECLARATION



Extruded Aluminum
Products of Aluminum and Aluminum Alloys

According to ISO 14025

Life Cycle Assessment: Results

Results given per one metric ton of extruded aluminum.

ENVIRONMENTAL IMPACTS

CML 2001 (Nov 2010)

Parameter	Unit	Manufacturing	End-of-Life	Credits
		A1-A3	C4	D
GWP	kg CO ₂ eq	6.57E+03	2.17E+00	-4.13E+03
ODP	kg CFC-11 eq	4.14E-07	2.50E-10	-1.74E-07
AP	kg SO ₂ eq	4.01E+01	8.86E-03	-2.95E+01
EP	kg PO ₄ ³⁻ eq	1.90E+00	8.03E-04	-1.22E+00
POCP	kg C ₂ H ₄ eq	2.21E+00	1.00E-03	-1.48E+00
ADPE	kg Sb eq	3.97E-03	8.03E-07	-2.20E-03
ADPF	MJ	7.13E+04	3.43E+01	-3.89E+04

TRACI 2.1

Parameter	Unit	Manufacturing	End-of-Life	Credits
		A1-A3	C4	D
GWP	kg CO ₂ eq	6.57E+03	2.17E+00	-4.13E+03
ODP	kg CFC-11 eq	4.41E-07	2.66E-10	-1.85E-07
AP Air	kg SO ₂ eq	3.75E+01	8.99E-03	-2.72E+01
AP Water	kg SO ₂ eq	6.13E-02	9.08E-06	-2.23E-03
EP Air	kg N eq	6.62E-01	1.30E-03	-3.88E-01
EP Water	kg N eq	1.12E-01	7.69E-05	-6.22E-02
SP	kg O ₃ eq	3.27E+02	1.40E-01	-2.10E+02
FF	MJ	5.91E+03	4.30E+00	-2.49E+03

RESOURCE USE

Parameter	Unit	Manufacturing	End-of-Life	Credits
		A1-A3	C4	D
PERE	[MJ]	3.12E+04	1.59E+00	-2.45E+04
PERM	[MJ]	0.00E+00	0.00E+00	0.00E+00
PERT	[MJ]	3.12E+04	1.59E+00	-2.45E+04
PENRE	[MJ]	7.13E+04	3.43E+01	-3.89E+04
PENRM	[MJ]	0.00E+00	0.00E+00	0.00E+00
PENRT	[MJ]	7.13E+04	3.43E+01	-3.89E+04
SM	[kg]	4.26E+02	0.00E+00	0.00E+00
RSF	[MJ]	0.00E+00	0.00E+00	0.00E+00
NRSF	[MJ]	0.00E+00	0.00E+00	0.00E+00
FW	[m ³]	1.37E+05	-8.20E+01	-1.07E+05

OUTPUT FLOWS AND WASTE CATEGORIES

Parameter	Unit	Manufacturing	End-of-Life	Credits
		A1-A3	C4	D
HWD	[kg]	1.69E+03	0.00E+00	-1.57E+03
NHWD	[kg]	7.82E+01	5.00E+01	-6.24E+01
RWD	[kg]	4.19E+00	4.42E-04	-2.35E+00
CRU	[kg]	0.00E+00	0.00E+00	0.00E+00
MFR	[kg]	8.47E+00	9.50E+02	0.00E+00
MER	[kg]	0.00E+00	0.00E+00	0.00E+00
EEE	[MJ]	0.00E+00	0.00E+00	0.00E+00
EET	[MJ]	0.00E+00	0.00E+00	0.00E+00

Glossary

Environmental Impacts

GWP	Global warming potential
ODP	Depletion potential of the stratospheric ozone layer
AP	Acidification potential
EP	Eutrophication potential
POCP	Photochemical oxidant formation potential
SFP	Smog formation potential
ADPE	Abiotic depletion potential for non-fossil resources
ADPF	Abiotic depletion potential for fossil resources
FF	Fossil fuel consumption

Resource Use

PERE	Renewable primary energy as energy carrier
PERM	Renewable primary energy resources as material utilization
PERT	Total use of renewable primary energy resources
PENRE	Non-renewable primary energy as energy carrier
PENRM	Non-renewable primary energy as material utilization
PENRT	Total use of non-renewable primary energy resources
SM	Use of secondary material
RSF	Use of renewable secondary fuels
NRSF	Use of non-renewable secondary fuels
FW	Use of net fresh water

Output Flows and Waste Categories

HWD	Hazardous waste disposed
NHWD	Non-hazardous waste disposed
RWD	Radioactive waste disposed
CRU	Components for re-use
MFR	Materials for recycling
MER	Materials for energy recovery
EEE	Exported electrical energy
EET	Exported thermal energy



ENVIRONMENTAL PRODUCT DECLARATION



Extruded Aluminum
Products of Aluminum and Aluminum Alloys



According to ISO 14025

Life Cycle Assessment: Interpretation

The results represent the cradle-to-gate and end-of-life environmental performance of a metric ton of extruded aluminum. The majority of the environmental impacts are from the production of the aluminum, however the credits from recycling the aluminum at end-of-life help to offset the initial burden.

As with any metal, the recycling rate has a significant impact on the life cycle environmental performance of extruded aluminum. A 95% recycling rate is assumed. Aluminum is an ideal material for recycling because the metal can be recycled over and over again without any loss in quality (AIA 2013).

Finally, it is interesting to note that the landfilling of extruded aluminum in C4 has a negative use of net fresh water (FW). This is due to the landfill collecting rain water and introducing it into the watershed as landfill leachate, following the blue water calculation methodology.

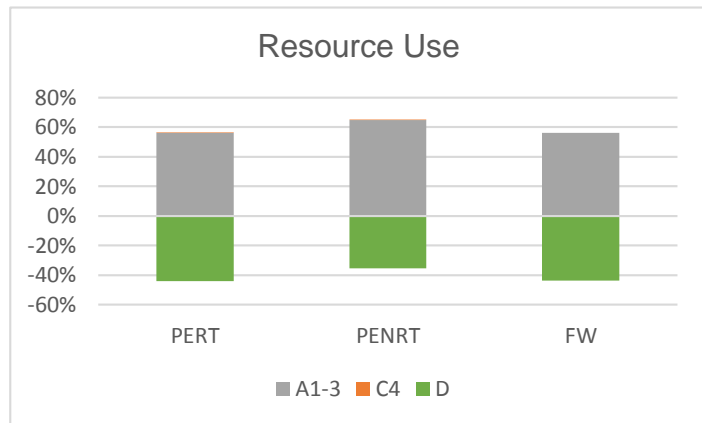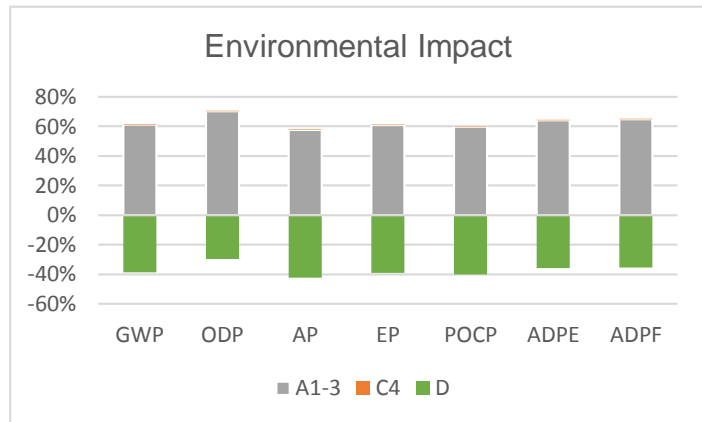

ENVIRONMENTAL PRODUCT DECLARATION



Extruded Aluminum
Products of Aluminum and Aluminum Alloys

According to ISO 14025

Participating Companies

Company	Data Category	Note
Alcoa Inc.	Bauxite, Alumina, Primary Aluminum, Recycled Aluminum, Hot and Cold Rolling, Extrusion	Includes Kawneer and Traco
Aleris International Inc.	Recycled Aluminum, Hot and Cold Rolling	
Alexandria Extrusion Company	Extrusion	
Century Aluminum Company	Primary Aluminum	
Constellium	Hot and Cold Rolling	At the time of data survey, it was owned by Rio Tinto Alcan
Grupo Cuprum	Recycled Aluminum, Extrusion	
Hydro Aluminum North America	Bauxite, Alumina, Recycled Aluminum, Extrusion	
Jupiter Aluminum Corporation	Recycled Aluminum, Hot and Cold Rolling	
Kaiser Aluminum	Recycled Aluminum, Hot and Cold Rolling, Extrusion	
KB Alloy	Recycled Aluminum	
Logan Aluminum	Recycled Aluminum, Hot and Cold Rolling	
Metal Exchange Corporation	Recycled Aluminum, Extrusion	
Minalex Corporation	Extrusion	
Nichols Aluminum	Recycled Aluminum, Hot and Cold Rolling	
Noranda Aluminum Inc.	Alumina, Primary Aluminum	
Novelis Inc.	Recycled Aluminum, Hot and Cold Rolling	
Ormet Corporation	Alumina, Primary Aluminum	
Peerless of America	Extrusion	
Penn Aluminum International LLC	Extrusion	
Rio Tinto Alcan	Bauxite, Alumina, Primary Aluminum	
Sapa Extrusions Inc.	Recycled Aluminum, Extrusion	
Scepter Inc.	Recycled Aluminum	
Sherwin Alumina	Alumina	
Smelter Service Corporation	Recycled Aluminum	
Tri-Arrows Aluminum Inc.	Recycled Aluminum, Hot and Cold Rolling	



ENVIRONMENTAL PRODUCT DECLARATION



Extruded Aluminum
Products of Aluminum and Aluminum Alloys

According to ISO 14025

References

EN 15804:2011-04: Sustainability of construction works — Environmental Product Declarations — Core rules for the product category of construction products.

IAI (2013). *Global Life Cycle Inventory Data for the Primary Aluminum Industry*. London, International Aluminium Institute. 2013.

ISO 14025. DIN EN ISO 14025:2009-11: Environmental labels and declarations — Type III environmental declarations — Principles and procedures.

IBU (2011). Institut Bauen und Umwelt e.V., Königswinter (pub.): Product Category Rules for Construction Products from the range of Environmental Product Declarations of Institut Bauen und Umwelt (IBU), Part A: Calculation Rules for the Life Cycle Assessment and Requirements on the Background Report. 2011. www.bau-umwelt.de.

IBU (2012). PCR 2011 Part B. Institut Bauen und Umwelt e.V., Königswinter (pub.): Product Category Rules for Construction Products from the range of Environmental Product Declarations of Institut Bauen und Umwelt (IBU), Part B: Requirements on the EPD for Products of Aluminium and Aluminium Alloys. 2012. www.bau-umwelt.de.

USGS (2011). *2010 Minerals Yearbook – Bauxite and Alumina*. Washington, D.C.: United States Geological Survey, Department of Interior. 2011.

